
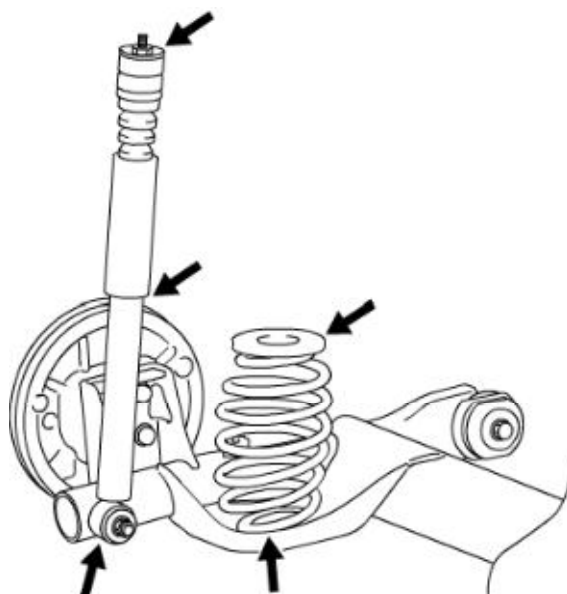


2A


Suspension System Inspection

Hoist vehicle and check for the following items. If defective parts is found, retighten, repair or replace with new one.

- Check suspension frame and arm for deformation, crack and damage.
- Check front strut assembly (shock absorber) and rear shock absorber for oil leakage, deformation, damage and installation condition.
- Check coil spring (front and rear) for installation condition.
- Check bushes for crack and damage.

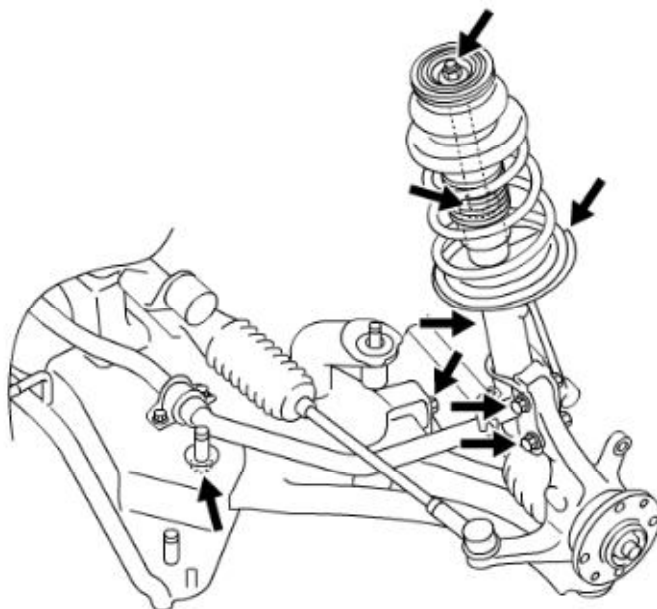

- Check suspension arm joint for play and suspension arm joint dust cover for crack.

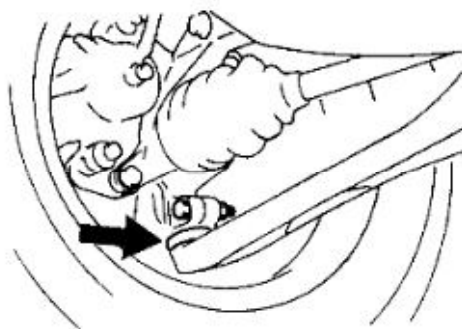

- Check other suspension component parts for installation condition (play and tightening).