


9B


Front Fog Light Assembly Removal and Installation (If Equipped)

WARNING:

- To avoid danger of being burned, don't touch when the bulb is hot.
- Don't touch glass surface of bulb to avoid deteriorate as the case may be unclear when bulb lights on at dirty condition.

Removal

- 1) Disconnect negative (-) cable at battery.
- 2) Remove front bumper. 
- 3) Disconnect coupler from fog light (2).
- 4) Remove fog light screws (3), and remove front fog light assembly (2).

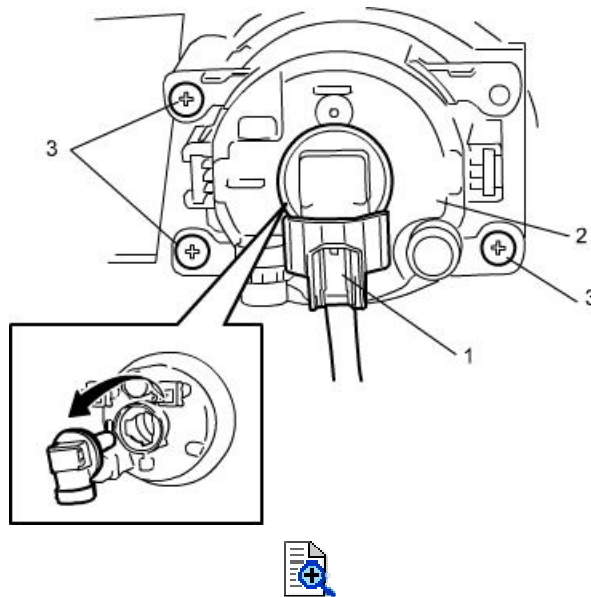

Installation

Reverse removal procedure for installation nothing the following:

- After installing, adjust aiming. 